

THE PRIMARY SHREDDER VB 450 DK

ENGLISH



HAMMEL
RECYCLINGTECHNIK



DRIVE*

engine	154 PS (114 KW) Cummins F3.8 - Stage 5
max. torque	80,000 Nm
engine speed	2,200 rpm
fuel capacity	180 l

DISCHARGE BELT*

discharge height	3,000 mm (33°)
discharge width	800 mm

SHAFTS*

working length	1,270 mm
total length	1,540 mm
shaft diameter	450 mm
rotation of shafts	up to 30 rpm

HOPPER*

hopper volume	2 m ³
main & tilting hopper	tilting hopper with surface for long materials

DIMENSIONS & WEIGHT*


length x wide x height	5.7 m x 1.8 m x 2.3 m
weight	10 t Maschine + 1 t Magnet

ADVANTAGES

- 3-part hopper extension for optimal feeding with wheel loader
- discharge height ensure container loading
- universal use through multifunctional shredding shafts
- user-friendly „easy to use“ control for different materials



example: 9/9 discs with 6 knives per disc

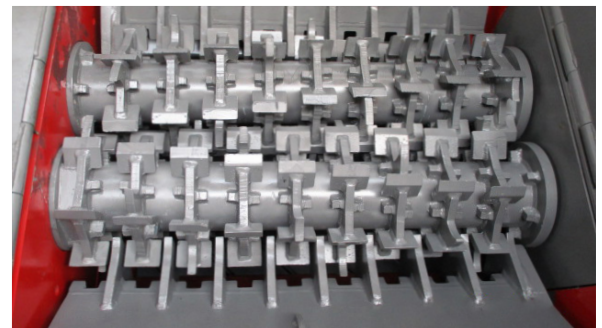

shredding shafts: 1,270 mm



*approximate values

THE PRIMARY SHREDDER VB 450 DK

ENGLISH




HAMMEL®
RECYCLINGTECHNIK

MATERIAL*

- wood: waste wood, pellets, cable drums, root stems, green waste
- waste: domestic waste, industrial waste, bulky, C & D, Paper rolls
- metal: aluminium profile

*The input material should not contain any foreign materials thicker than 3 mm.

DIMENSIONS*

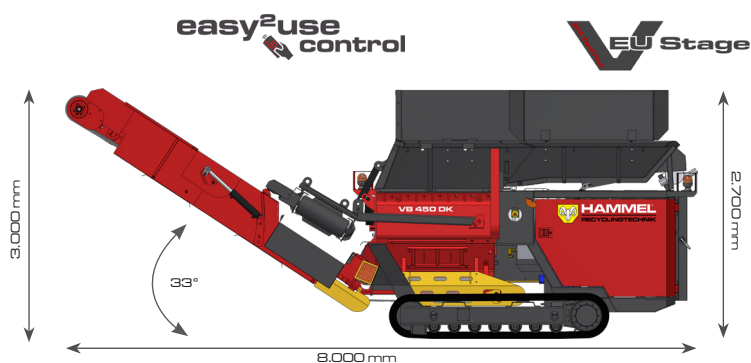

PRINCIPLE

- hydraulically operated low-speed shredder with 2 special counter-rotating shafts
- direct feeding with material on the shafts or into the tilting hopper
- material is shredded directly through the shafts
- metal separation (ferrous metals) via permanent-overbelt magnet

